



QUALITY ★★★★★

Bi Tech 4.4

Loudspeaker cable bi-wiring, silver-plated, 2x2.5/2x4.0 mm², with lug

Highly coordinated and outstandingly well-made bi-wiring loudspeaker cable – preassembled with high-quality Oehlbach Fusion cable-shoe connectors. 2 x 2.5 mm² silver-plated oxygen-free copper (SPC) for mid-tones and trebles and 2 x 4 mm² oxygen-free copper (OFC) for the loss-free transmission of basses. It reproduces an impressively natural and detailed sound. The use of very high-quality materials both for the conductors as well as for the insulation guarantee great flexibility along with outstanding powerful bass and simultaneously high-resolution treble values.

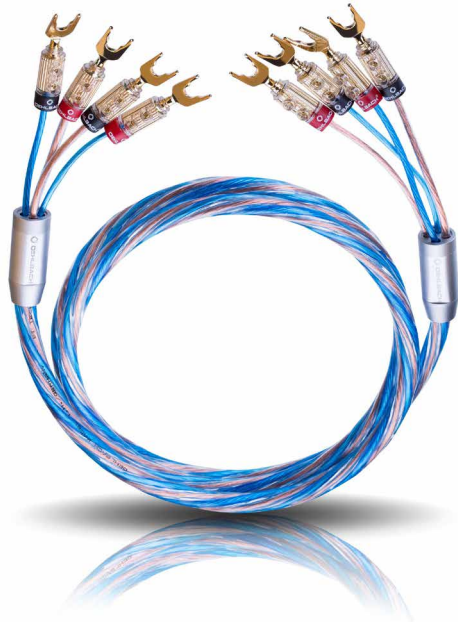

Features


- ✓ 24- carat gold-plated contacts
- ✓ stereo speaker cable
- ✓ Rigorous separation of signal routes
- ✓ For amplifier performances of up to 350 watts
- ✓ Ultra-thin individual wires
- ✓ Reliable contact
- ✓ Made in Germany

Technical Data

Inner conductor material	SPC/OFC - silver-plate oxygen-free copper
Cable sheathing	plastic
Cable geometry	Round
Concept	Bi-Wiring
Special length	Also available in individual customised lengths
Plug type	Angled

Designation	Art. No.	Unit	Colour
Bi Tech 4.4 200	10822	2 m	Blue/Copper
Bi Tech 4.4 300	10823	3 m	Blue/Copper
Bi Tech 4.4 400	10824	4 m	Blue/Copper
Bi Tech 4.4 500	10825	5 m	Blue/Copper

CONNECTIONS



Terminal Terminal

SIGNALTYPE



Audio

SIGNALDIRECTION



Bi-Directional

IN
SPEAKER

OUT
AV-RECEIVER | AMPLIFIER