



**QUALITY** ★★★★★

## Bi Tech 4.4B

Loudspeaker cable bi-wiring, 2x2,5/2x4,0 mm<sup>2</sup>, with banana connector

Highly coordinated and outstandingly well-made bi-wiring loudspeaker cable – preassembled with high-quality Oehlbach Fusion banana connectors. 2 x 2.5 mm<sup>2</sup> silver-plated oxygen-free copper (SPC) for mid-tones and trebles and 2 x 4 mm<sup>2</sup> oxygen-free copper (OFC) for the loss-free transmission of basses. It reproduces an impressively natural and detailed sound. The use of very high-quality materials both for the conductors as well as for the insulation guarantee great flexibility along with outstanding powerful bass and simultaneously high-resolution treble values.

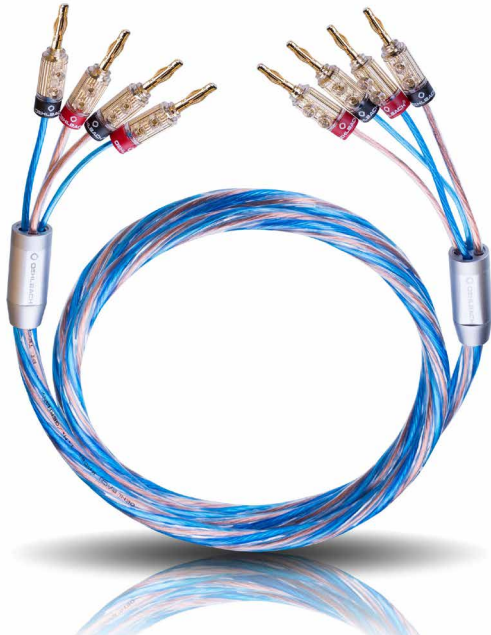

### Features

- ✓ 24- carat gold-plated contacts
- ✓ stereo speaker cable
- ✓ Rigorous separation of signal routes
- ✓ For amplifier performances of up to 350 watts
- ✓ Solid full-metal plug
- ✓ Ultra-thin individual wires


### Technical Data

Cable cross-section	2 x 2.5 mm <sup>2</sup> + 2 x 4.0 mm <sup>2</sup>
Cable geometry	Round
Concept	Bi-Wiring
Special length	Also available in individual customised lengths
Plug type	Straight

Designation	Art. No.	Unit	Colour
Bi Tech 4.4B 200	10832	2 m	Blue/Copper
Bi Tech 4.4B 300	10833	3 m	Blue/Copper
Bi Tech 4.4B 400	10834	4 m	Blue/Copper
Bi Tech 4.4B 500	10835	5 m	Blue/Copper

350 W
Bi Wiring
Ultra Thin Strands
24 ct

#### CONNECTIONS



Terminal Terminal

#### SIGNALTYPE



Audio

#### SIGNALDIRECTION



Bi-Directional

**IN**   
SPEAKER

**OUT**   
AV-RECEIVER | AMPLIFIER