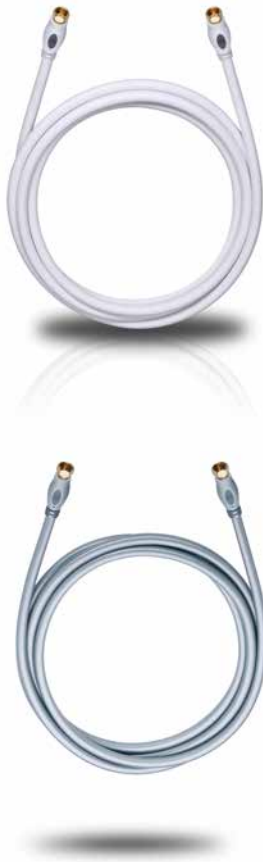



**QUALITY** ★★★★★


## Transmission Plus S

### Digital satellite cable

Preassembled digital satellite cable for the transmission of high-resolution audio and image data. The inner conductor used in this very well-made satellite cable is manufactured from oxygen-free copper (OFC); its fourfold shielding means that it is particularly suited for the transmission of sensitive HDTV signals!


### Features

- ✓ Full HD – Video
- ✓ >120 dB Shielding
- ✓ fourfold shielding
- ✓ Robust plastic sheathing
- ✓ 24 ct gold plated plug
- ✓ OFC – oxygene free copper
- ✓ Coaxial cable layout
- ✓ 75 ohm wave impedance
- ✓ Compatible with DVB-S/S2

### Technical Data

Shielding dimension	120 dB
Capacity	52 pF/m
Inner conductor material	OFC – oxygene free copper
Cable sheathing	plastic
Shielding quantity	fourfold shielding
Shielding material	2 x aluminium foil + 2 x copper braid
Plug design	Enclosed plastic plug
Characteristic wave impedance	75 Ω
Cable geometry	Round
Plug type	Straight
Shielding rate	110dB

Designation	Art. No.	Unit	Colour
Transmission Plus 170 S	2830	1.7 m	white
Transmission Plus 220 S	2831	2.2 m	white
Transmission Plus 320 S	2832	3.2 m	white
Transmission Plus 500 S	2833	5.1 m	white
Transmission Plus 750 S	2834	7.5 m	white
Transmission Plus 1000 S	2835	10 m	white
Transmission Plus 75 S	2836	0.75 m	white
Transmission Plus S 120	2837	1.2 m	white
Transmission Plus 170 S	2840	1.7 m	silver
Transmission Plus 220 S	2841	2.2 m	silver
Transmission Plus 320 S	2842	3.2 m	silver
Transmission Plus 500 S	2843	5.1 m	silver
Transmission Plus 750 S	2844	7.5 m	silver
Transmission Plus 1000 S	2845	10 m	silver


**CONNECTIONS**

**SIGNALTYPE**

**SIGNALDIRECTION**


Bi-Directional

**IN**

TV | TUNERBOX | HDD RECORDER | SAT RECEIVER

**OUT**

SAT